



### Features


- No visible wires or screws
- No fascia, valance, or ceiling pocket required
- Modular brackets allow system design to complement architecture
- Jamb mount (R1/R2) and floating mount (R3/R4) options available
- Coupler brackets (R5) pair with jamb and floating mount brackets and can be used to power multiple shades with a single motor
- Shades can be controlled individually in a connected sequence using Double Motor Mount brackets (R3D/R4DW)
- 90° brackets available to continue series of shades around a corner
- Wired and wire-free rechargeable power options available
- Savant, Control 4, Crestron, and Lutron compatible
- Cradle to Cradle and GREENGUARD Gold certified fabrics available
- Covered by Limited Lifetime Warranty

### Specs

- Hardware milled from solid aluminum
- Aluminum can be anodized clear, anodized black, or custom powder coated
- Maximum shade widths are 8ft with standard tubes, and 10ft with HD tubes. Larger, custom solutions available upon request.
- Minimum jamb size: 2 3/8<sup>th</sup> in. for standard brackets and 2 in. for mini brackets

### Bracket Dimensions

#### Standard Brackets

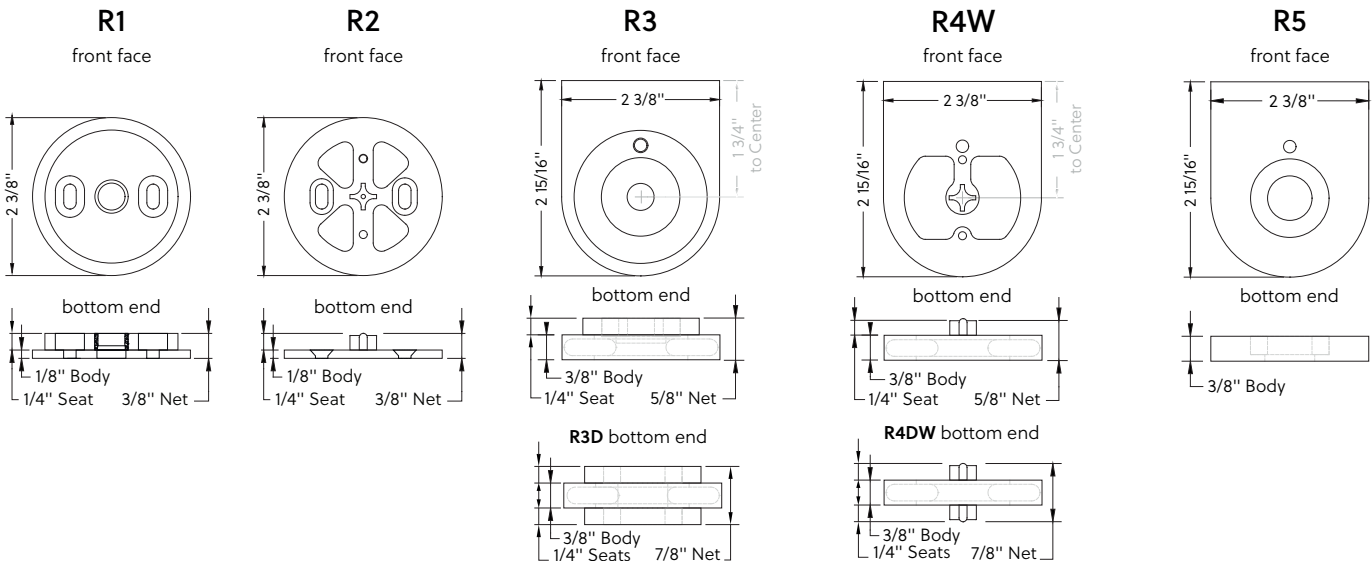

#### Specialty Brackets

